


HYER STANDARDS

Mobile Plant

The Hansen Yuncken HYer Standards provide guidance on the minimum level of compliance expected for high risk activities on all projects.

Plant Work Zones

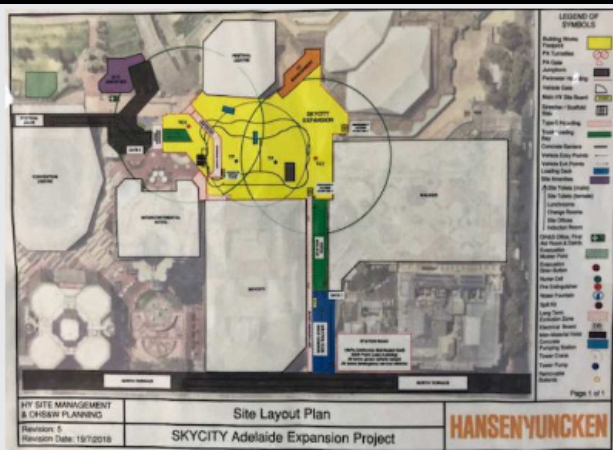

- Engineered work platforms are to be established and maintained based on geotechnical information
- Suspended/roof slabs must be able to safely support the weight of any plant likely to operate on them. Structural engineer's inspection records of completed poured slabs must be obtained
- The site layout plan should include plant work zones and exclusion zones
- Spotters are to be used when mobile plant is moving from one work zone to another

Movement of Plant




- Safe vehicle access/egress into and through site must be maintained
- Safe pedestrian access ways are to be clearly established. Delineation is to be selected based on the nature of works and site conditions
- Spotters are to be used when mobile plant is operating in the vicinity of people, other plant, or structures
- Positive communication between mobile plant operators and ground workers is to be used
- On site traffic rules must be established for the site and communicated to workers, visitors, and delivery truck drivers

Plant Safety



- A plant safety verification is to be undertaken upon arrival and plant must be approved for use at site by HY
- The plant verification sticker must be displayed on HY sites
- A Plant Setup permit is to be issued for piling rigs, mobile cranes, concrete boom pumps and all terrain EWP's

Operation of Mobile Plant

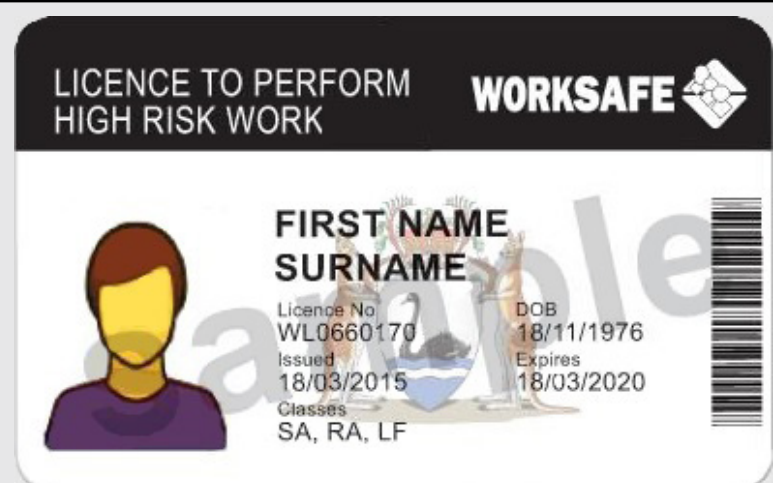

naratraining.com.au

- Operators must hold appropriate licences as required (e.g. high risk work licence)
- Operators are to keep documented records of competency for the mobile plant that they operate
- Operators who do not hold HRWLs must have a VOC issued by an RTO for the appropriate unit of competency
- Daily plant pre-start inspection is to be completed and recorded



WORK DIFFERENTLY
WWW.HYWORKZONE.COM.AU

REV 08 - SEP 2022



**MOBILE PLANT
PROCEDURE**