

Environmental assessment procedure for routine and minor works

Activity checklist

EIA-PO5-G01-T01

Contents

Environmental assessment procedure for routine and minor works.....	1
1 Introduction	1
1.1 Scoping the works.....	1
1.2 Using the environmental corridors database.....	1
2 The disturbed zone	1
3 Activity checklist.....	5

1 Introduction

1.1 Scoping the works

The project manager should identify the full scope of the works required to carry out the activity. When identifying the scope, all parts of the proposal should be considered. This includes the works themselves and construction activities, including any ancillary facilities, temporary access or other temporary facilities required for construction. Any vegetation removal or trimming should be included in the scope that is identified.

The *REF preliminary scoping checklist* (EIA-P05-G02-T01) is a tool that can be used by the project manager in conjunction with environment staff to help scope the works and likely impacts.

1.2 Using the environmental corridors database

The project manager is required to review the RTA environmental corridors database to determine whether the location of all the works is in or near to any areas marked red on the database. The environmental corridors database is available from [file path link to database on Techninfo].

Areas marked red in the database identify locations of potentially higher environmental sensitivity. This may be due to the presence of endangered ecological communities, threatened species habitat, heritage items or other areas of environmental sensitivity. In the areas marked red works may have a higher likelihood of environmental impact.

Where any of the works are located in a red area marked on the environmental corridors database, consideration must be given to the type of works being carried out and whether these are likely to adversely impact on the identified area of environmental sensitivity. If necessary, further advice should be sought from regional environment staff.

2 The disturbed zone

Unless specified the activities included below apply to works in disturbed zones only. For the purpose of the activity checklist, the disturbed zone includes only those areas that have been previously subject to physical disturbance during road construction or maintenance.

This includes for example:

- Road pavements.
- Cleared shoulders.
- Embankments.
- Footpaths.
- Culverts.
- Catch, surface and longitudinal drains.
- Sight benches.
- Existing access tracks.
- Median areas (where previously disturbed).
- Areas up to 3m either side of existing fences or noise barriers.
- Bridges.

- Batters.
- Cycle paths.
- Landscaped areas.

The disturbed zone does not include:


- Waterways (ie creeks, streams, rivers, wetlands and lakes) where there will be any structures, plant, equipment or any works carried out in the waterway.
- Areas not subject to vegetation clearing in the last 10 years.
- Remnant native vegetation, mature trees or hollow-bearing trees.
- Any sandstone platforms or exposures in the Sydney Basin.
- Land in the National Park estate, State Environmental Planning Policy No. 14 – Coastal Wetlands, State Environmental Planning Policy No. 26 – Littoral Rainforests.

Note: The extent of works, such as vegetation clearing or trimming, carried out for activities in the checklist should not exceed the extent of clearing or trimming previously undertaken in that location. If the extent of works is to exceed previous vegetation clearing or results in other impacts, contact RES for advice on the level of environmental assessment required. Vegetation clearing in the disturbed zone carried out under Step 1 of the procedure must be for the purpose of removing a traffic hazard. If vegetation trimming is for any other purpose, contact RES for advice.


Unless works are carried out in the road reserve, the consent of the owner of the land is required before carrying out any works.

Figure 2.1: Disturbed zone figures. These are to be used in conjunction with the descriptions of the disturbed zone outlined in section 2 above.


Urban areas

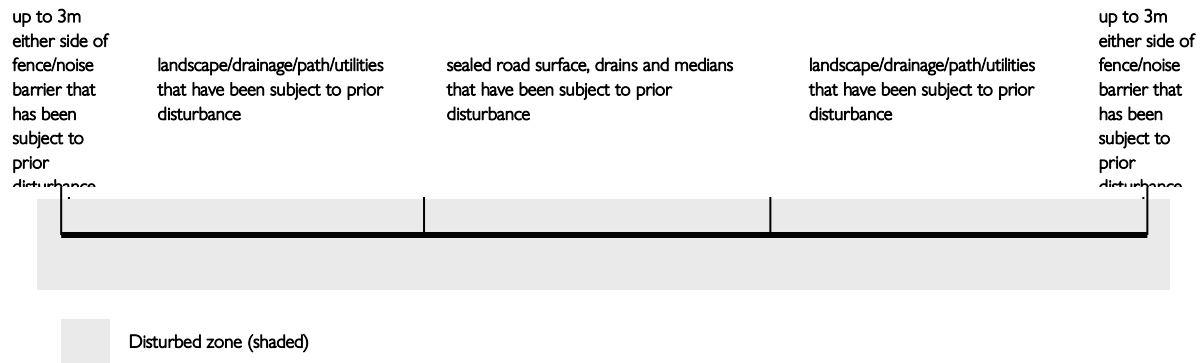


Rural areas

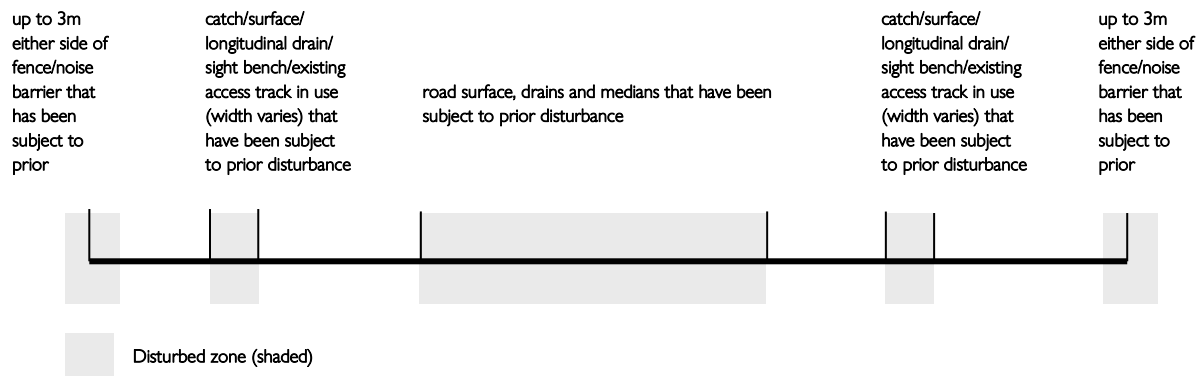

Bridge on structure

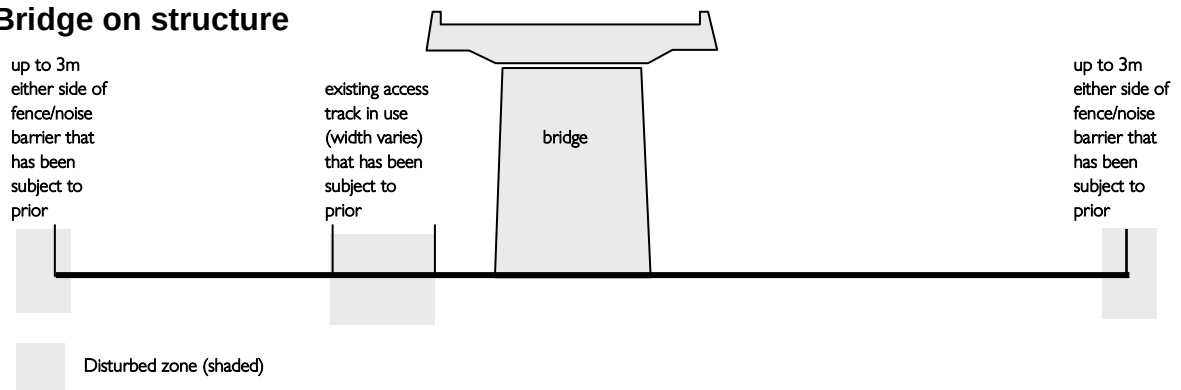

Bridge on embankment

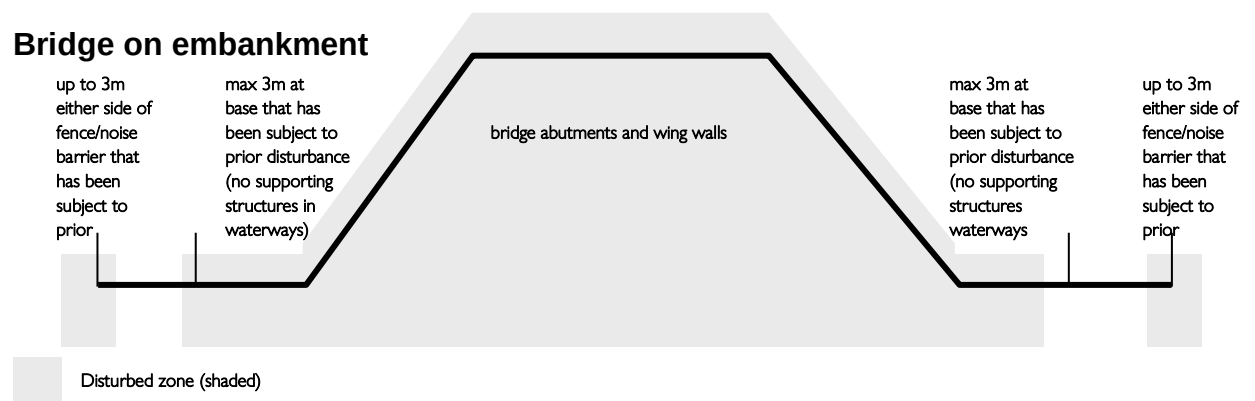

3 Activity checklist

The project manager is required to review the activity checklist to identify whether or not the proposed activities are included.

If more than one activity is proposed, each individual activity is required to be on the checklist below before being carried out as a routine or minor works activity.

Example:

General maintenance works required on a timber bridge would need to consider each of the individual activities proposed eg:

- Bridge and tunnel cleaning and maintenance.
- Vegetation control and landscaping.
- Deck and footway repairs.
- Timber element maintenance.
- Temporary structures / scaffolding.
- Paint repairs.

If all the proposed activities ARE on the checklist below, then determine if all the applicable safeguards listed in the *Standard safeguards list (EIA-PO5-G01-T01)* can be implemented.

If the proposed activities ARE NOT listed on the checklist below or are items listed as excluded, consult with RTA regional environment staff to identify what level of environmental assessment is required.

Unless specified, all the activities in Table 1 must be carried out in the disturbed zone.

Table 1: Activity checklist for routine and minor works.

Activity	Description
General inspections	
General inspections	INCLUDES: - Condition assessment and recording of defects, road safety assessments. EXCLUDES: - Geotechnical investigations (unless carried out in accordance with the geotechnical investigations activity descriptions in this checklist).
Bridge inspections	INCLUDES: - Activities required to carry out non-invasive inspections and condition assessment of bridges and tunnels, including underwater inspections. - Activities required to carry out security inspections of assets.
Survey	
General survey investigations	INCLUDES: - Non invasive activities required to carry out general survey investigations. - Installation of survey marks, placement of survey control marks, locating underground utilities and over water surveys (soundings). EXCLUDES: - Installation of survey marks or placement of control marks on mature native vegetation, or within 20m of or in a cave, rock shelter or a cave mouth. - Vegetation clearance for 'line of sight' purposes that goes beyond the disturbed zone. - Geotechnical investigations (unless carried out in accordance with the geotechnical investigations activity descriptions in this checklist).
General underground utilities investigations	INCLUDES: - Non invasive activities required to carry out underground utilities investigations. - Activities required to carry out potholing (bore hole) for underground utilities investigations. - Activities required to carry out slit trenching for underground utilities investigations. EXCLUDES: - Potholing (bore holes) and slit trenching in water. - Potholing (bore holes) and slit trenching on sandstone or heritage kerb and guttering. - Activities that will result in any increase in stormwater drainage or run-off from the site concerned.
Geotechnical investigations	
Geotechnical investigations - no excavation required	INCLUDES: Activities required to carry out geotechnical investigations including but not limited to: pavement beaming, laser roughness testing, radar testing, standard penetration testing, Cone Penetrometer Testing (CPT), Dynamic Cone Penetrometer (DCP), Seismic refraction / reflection testing, and electrical resistivity testing.
Geotechnical investigations - requiring excavations	INCLUDES: Activities required to carry out geotechnical activities (including drilling, test pitting and sampling).

Activity	Description
	EXCLUDES: • Drilling in water. • Activities that will result in any increase in stormwater drainage or run-off from the site concerned.
Pavement maintenance	
Routine pavement maintenance	INCLUDES: • Activities required to repair pavement. Includes pavement rehabilitation, potholes, patching, edge drop-offs, edge breaks, correction of surface distortions, defects of the wearing surface and all repairs required to eliminate hazardous conditions.
	EXCLUDES: • Activities required for works involving the initial sealing of unsealed pavements. • Any works on historic heritage pavement such as sandstone pavers / wood block road base. • Any works on sandstone or heritage kerb and guttering. • Any works to widen the existing Disturbed Zone.
Corridor maintenance	
General corridor maintenance	INCLUDES: • Activities required for collecting, disposing and sweeping of litter and debris. • Activities required to remove graffiti and posters.
Vegetation control and landscaping	INCLUDES: • Activities required to control terrestrial vegetation by mowing, slashing and spraying vegetation. • Activities required to remove or trim saplings (<100mm in diameter at 1500mm above ground level). • Activities required to trim regrowth. • Activities required for the trimming of trees and shrubs to ensure maintenance of legal clearances, appropriate sight distances for both road user and pedestrians. • Activities to carry out landscaping maintenance. • The clearing of existing firebreaks. EXCLUDES: • The clearing of remnant native vegetation or vegetation greater than that previously cleared within the Disturbed Zone at each specific location. • The clearing of vegetation from areas identified with a <i>Significant Environmental Road</i> sign. • The clearing of new firebreaks. • Removal of mature trees or hollow-bearing trees (including dead trees). • Removal of commemorative, scarred or survey trees.
Roadside asset maintenance	INCLUDES: • Activities required to repair, replace or maintain boundary fencing, noise barriers, fauna fencing, glider poles, fauna rope bridges, nest boxes, safety barriers, stock grids and braces. • The removal of regrowth vegetation for a 3m width either side of the fence / barrier.

Activity	Description
	EXCLUDES: • The clearing of remnant native vegetation or vegetation greater than that previously cleared at each specific location. • Removal of mature trees. • Removal of commemorative, scarred or survey trees. • The installation of new noise barriers or pedestrian/safety fencing.
Maintenance of pedestrian and cyclist facilities	INCLUDES: • Activities required to maintain existing pedestrian and cyclist facilities (such as footpaths, kerb adjustments and ramps, pedestrian fences, refuges, holding rails, and bollards).
Street lighting	INCLUDES: • Activities required for the maintenance, reconstruction, repair or replacement of any existing street lighting, if any replacement involves the replacement of existing materials with similar materials only and if the lighting minimises light spill and artificial sky glow in accordance with AS/NZS 1158:2007, Lighting for Roads and Public Spaces, and any associated landscaping works. EXCLUDES: • The erection or installation of new street lighting.
Maintenance of stockpile sites	INCLUDES: • Activities required to maintain existing stockpile sites in accordance with RTA's <i>Stockpile Management Guide</i>. EXCLUDES: • Activities to establish new or expand existing stockpile sites.

Activity	Description
Servicing vacant properties	<u>Note: This activity can be undertaken outside the Disturbed Zone.</u> INCLUDES: - Activities required to service vacant property including vegetation control, the removal of illegally dumped material, vermin control by mowing, existing fire break maintenance and fencing of perimeters. - Activities required to maintain building security, stability and weather-protection: - Clean guttering and downpipes. - Seal off fireplaces with reversible timber infill. - Seal off access points on building perimeters with reversible timber infill. - Like for like replacement of failed or damaged guttering, roof flashing, roofing materials or other drainage. - Like for like repair and replacement of damaged openings including windows, window frames and sashes, doors and door frame. - As part of any fencing activities, the fences: - Must be for an infrastructure facility and erected along road frontage or non-road boundary. - The height must not exceed 2.15m above ground level (existing). - Must be constructed so as not to prevent natural flow of stormwater drainage or run-off. - If in a residential zone, height of boundary fence must not exceed 1.8m above ground level (existing) if behind front building line and 1.2m if forward of that line. - Must not include masonry construction to a height of more than 900mm above ground level (existing). EXCLUDES: - The clearing of vegetation greater than that previously cleared at each specific location. - Areas not subject to vegetation clearing in the last 10 years. - The clearing of new firebreaks. - The clearing of remnant native vegetation or removal of mature trees. - Activities on heritage listed properties.
Monitoring and routine slope maintenance	INCLUDES: - Like for like repair and replacement of rock fall protection fencing and netting, retaining walls, reinforced soil structures and gabion structures. EXCLUDES: - The stabilisation of batter slopes or cuttings. - Installation of new slope stabilisation structures (eg rock fall protection fencing and netting, retaining walls, reinforced soil structures, gabion structures, shotcrete). - Reconstruction or removal of heritage structures (eg sandstone retaining walls or culverts). - The clearing of remnant native vegetation or vegetation greater than that previously cleared within the Disturbed Zone at each specific location. - Removal of mature trees.

Activity	Description
Operational assets	
Bus stops	INCLUDES: - Activities required for construction, maintenance or repair of bus stops or shelters (but not including any commercial advertising on them) outside an area serviced by STA buses, if: - They have a height above the footpath of not more than 3.2m. - They have only non-reflective finishes. - They do not obstruct the line of sight of vehicular traffic or pedestrian traffic. - They comply with the development standards, and other requirements, relating to bus stops and shelters in a relevant development control plan. - Any associated kerb construction, access paths and ramps, lighting and signage complies with AS:1428.2 and relevant Disability Standards. EXCLUDES: - The installation of bus stops or shelters in RTA Sydney region. - The installation of any associated pedestrian/safety fencing.
Temporary structures / scaffolding	INCLUDES: - Activities required for the installation, replacement or maintenance of temporary structures (such as temporary bus stops, bus shelters or signs) that are associated with alternative transport arrangements necessitated by road works or road maintenance or repair and that are removed as soon as practicable. - Activities required for scaffolding including the erection in conjunction with erection or demolition of, or carrying out of alterations or additions to, a building or carrying out of maintenance or repairs (for which, in each case, any required consent has been obtained). As part of the scaffolding works: - Scaffolding must not encroach onto footpath or public thoroughfare. - Temporary fencing must be provided to restrict unauthorised access to site if scaffolding is within 3m of any boundary. - Scaffolding must be removed immediately on completion of work if removal will not give rise to safety risk. EXCLUDES: - The clearing of remnant native vegetation or vegetation greater than that previously cleared within the Disturbed Zone at each specific location. - Removal of mature trees. - Any work that requires the installation of scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Rest areas and roadside facilities	INCLUDES: - Activities associated with the repair and rehabilitation of roadside facilities and rest areas (including existing toilet facilities). EXCLUDES: - The installation of toilet facilities (permanent). - The permanent closure of a rest area. - The removal or relocation of official memorial elements and structures (eg official plaques, cultural plantings, historic milestones).

Activity	Description
Drainage maintenance	
Drainage works	INCLUDES: - Activities required for maintenance, reconstruction or repair of any drainage works to improve the quality or control of stormwater runoff, including: - Activities required to clean and carry out minor repairs to subsoil drains. - Activities required to clean and repair surface drainage systems including stormwater drains, culverts, headwalls, kerb structures and gross pollutant traps and pits. - Activities required to clean and reform table drains to their original shape and depth. - Activities required for the erection, installation and maintenance, reconstruction, repair or replacement of any kerb and guttering or culvert wingwalls. - Activities required to clean and reform mitre drains to their original shape and depth. - Associated landscaping works. EXCLUDES: - Works that involve clearing or earthworks greater than that previously carried out at each specific location. - The installation of surface drainage systems. - The installation of subsoil drainage systems. - The replacement or alteration of historic non-concrete drainage elements. - The replacement or alteration of historic non-concrete kerb and guttering. - Culvert extensions. - Any works in wet/flowing culverts, creeks, rivers or other waterways. - Any disturbance to fauna, including roosting bats.
Traffic facility maintenance	
Guide post maintenance	INCLUDES: Activities required to maintain, repair, replace or install new guide posts (or snow poles) and delineators (including those delineators on guide posts, traffic facility assets and safety barriers).
Existing and temporary traffic signals	INCLUDES: - Activities required for the erection, installation, maintenance, reconstruction, repair or replacement of existing traffic lights (including any removal from or addition to) of items such as signal displays, loops or buttons. - Installation of temporary / portable traffic signals for use during construction. EXCLUDES: - Activities associated with new signalised intersections.
Road / pavement markings	INCLUDES: - Activities required to install, maintain, reconstruct, repair or replace pavement and road surface markings (such as bus lane markings), lane delineators, electric pavement lights, detection loops, and traffic counters. EXCLUDES: - The installation of new audio-tactile line marking.

Activity	Description
Sign installation and maintenance	INCLUDES: - Activities required to install, maintain, repair or replace directional, safety or other advisory signs relating to road works or the use of existing road infrastructure facilities, including: - Replacement of an existing sign or signs of similar dimension and material. - Minor modifications of an existing sign, up to a 50% increase in the original sign area. - Installation of regulatory signs of less than 2m² in size. - Single signs installed on pipe posts. - Minor modifications to sign location, including to allow for a new driveway or to improve sight distance at an intersection. EXCLUDES: - The installation of permanent VMS signs. - The installation of new signage on gantries. - The installation of signs over 2m² in size. - The clearing of remnant native vegetation or vegetation greater than that previously cleared at each specific location. - Removal of mature trees.
Bridge, tunnel and ferry operations (heritage and non-heritage bridges, tunnels and ferries)	
Bridge opening and closing	INCLUDES: - Activities required for the opening and closing of a bridge span. - Inspection of bridge lights, gates and other utilities.
Cleaning tunnel walls	INCLUDES: Activities required for the cleaning and washing down of tunnel walls to remove accumulated dirt, grime, laitance, etc.
Electrical maintenance	INCLUDES: - Activities required for the inspection, repair, maintenance and replacement of electrical equipment and components associated with ferries, bridges and tunnels. - Replacement of lighting. EXCLUDES: - The replacement of electrical equipment and components associated with heritage bridges, tunnels and ferries.
Mechanical maintenance	INCLUDES: - Activities required for the inspection, repair, maintenance and replacement of mechanical equipment and components associated with ferries, bridges and tunnels. EXCLUDES: - The replacement of mechanical equipment and components associated with heritage bridges, tunnels and ferries.
Fire fighting emergency equipment maintenance	INCLUDES: Activities required for the inspection, testing and maintenance of fire fighting emergency equipment.

Activity	Description
Routine bridge works – Non-heritage bridges	
Bridge and tunnel cleaning and maintenance	INCLUDES: - Activities required to clean and maintain bridges and tunnels, including removal of posters and graffiti, litter and debris removal, minor spot painting activities and replacement of related plumbing and lighting. - Activities for manual clean out of scuppers clean out and flood timber removal. - Hand wash activities to wash down columns/piles/headstocks. EXCLUDES: - Any disturbance to threatened fauna (eg roosting bats, osprey). - Creation of any new access tracks. - Mechanical, jet wash or water blasting activities. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bearing maintenance	INCLUDES: - Activities required for the cleaning, lubricating, applying protective coating, or replacing bearing components including hold-down bolts. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Joint maintenance	INCLUDES: - Activities required for the cleaning, resealing, or replacing failed joint materials with similar joint product. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bolt tightening and replacement - timber elements	INCLUDES: - Activities required to replace missing or broken bolts, or tightening any loose bolts in timber elements. This action relates to bolts in any timber element where the element can continue to perform its design function satisfactorily, but more particularly to bolts in timber deck elements. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Deck and footway repairs	INCLUDES: Activities required to repair deck or footway areas where damage is a potential hazard to the safe passage of vehicular or pedestrian traffic. Includes installation of anti-slip coatings.
	EXCLUDES: Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Timber element maintenance	INCLUDES: Activities required for the rehabilitation and/or preservative treatment to timber elements.

Activity	Description
	EXCLUDES: Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Inspection and termite treatment	INCLUDES: - Activities required for inspection and eradication of termites using chemical treatments or physical barriers. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Minor paint repairs	INCLUDES: - Like for like minor spot painting of the top coat where there may be chalking, peeling or other distressed areas (excluding exposed surfaces that have not been painted previously). - Preparing the surface of existing paint for painting using manual methods such as hand scraping, wash down (excluding jet wash and water blasting), or light rub. - Clean and spot blast surfaces (as long as the works take place on $\leq 10\%$ of total bridge surface area) that have freckled rust or where the protective coating is no longer effective using rust inhibitor. EXCLUDES: - Activities involving lead paint removal or repair. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Minor concrete repairs and concrete elements	INCLUDES: - Activities required to repair, rehabilitate and/or replace $\leq 10\%$ of concrete structural elements. - Sealing minor cracks/spalls with no evidence of corrosion. - Patching areas where there is evidence of corrosion but without significant loss of reinforcing steel section. - The removal of all damaged concrete and reinforced steel by water blasting or mechanical removal. - Repairs to abutments using shotcrete. - Slab jacking. - Repair of piers or pile caps. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Masonry / brick repairs	INCLUDES: - Activities required to restore line and level of masonry or brick facing, or integrity of masonry or brick facing where movement or deterioration is not of structural significance. EXCLUDES: - The installation of new masonry bridge structures. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).

Activity	Description
Repair of railings / traffic barriers	INCLUDES: - Activities required to replace damaged segments of guardrail or traffic barrier sections, including guardrail in adjacent approaches to the bridge. - Kerb and rail washdown using potable water where all debris is contained and scuppers are blocked. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Existing cathodic protection systems	INCLUDES: - Activities required for the maintenance and replacement of existing cathodic protection systems. EXCLUDES: - Installation of new cathodic protection systems. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bridge timber elements - other	INCLUDES: - Activities required for the replacement and rehabilitation of timber deck elements, including the installation of a spray seal timber deck. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bridge - steel elements	INCLUDES: - Activities required for the repair and rehabilitation of steel bridge elements, as long the works take place on <10% of the bridge elements. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Scour protection	INCLUDES: - Minor scour locations are filled with local soil, gravel or rubble. - Minor earthworks and excavation to key in the base of the structure - Scour prevention material placed on fill sections. EXCLUDES: - Scour protection in waterways. - Any work that requires the installation of scaffolding or structures erected from within a watercourse (does not include hung or suspended scaffolding).
Routine bridge works – heritage items (Note: a heritage bridge is any bridge that has been assessed as having heritage significance (eg local or state). These bridges are usually registered on heritage lists like the RTA s170 register. However, some heritage bridges are in the process of being put on the RTA s170 register and you must first seek advice from regional environment staff on whether a bridge is a heritage bridge.)	
Bridge and tunnel cleaning and maintenance	INCLUDES: - Activities required to clean and maintain bridges and tunnels, including removal of posters and graffiti, litter and debris removal, minor spot painting activities and replacement of related plumbing and lighting. - Activities for manual clean out of scuppers clean out and flood timber removal. - Hand wash activities to wash down columns/piles/headstocks.

Activity	Description
	EXCLUDES: - Any disturbance to threatened fauna (eg roosting bats, osprey). - Creation of any new access tracks. - Mechanical, jet wash or water blasting activities. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bearing maintenance	INCLUDES: - Activities required for the cleaning, lubricating, applying protective coating, or replacing bearing components including hold-down bolts. EXCLUDES: - Activities not using like for like materials. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Joint maintenance	INCLUDES: - Activities required for the cleaning, resealing, or replacing failed joint materials with similar joint product. EXCLUDES: - Activities not using like for like materials. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bolt tightening and replacement - timber elements	INCLUDES: - Activities required to replace missing or broken bolts, or tightening any loose bolts in timber elements. This action relates to bolts in any timber element where the element can continue to perform its design function satisfactorily, but more particularly to bolts in timber deck elements. EXCLUDES: - Activities not using like for like materials. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Deck and footway repairs	INCLUDES: - Activities required to repair deck or footway areas where damage is a potential hazard to the safe passage of vehicular or pedestrian traffic. Includes installation of anti-slip coatings. EXCLUDES: - Activities not using like for like materials. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Timber element maintenance	INCLUDES: - Activities required for the rehabilitation and/or preservative treatment of timber elements. EXCLUDES: - Any work that requires installation of emergency bridging equipment. - Activities not using like for like materials. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).

Activity	Description
Inspection and termite treatment	INCLUDES: - Activities required for inspection and eradication of termites using chemical treatments or physical barriers. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Minor paint repairs	INCLUDES: - Like for like minor spot painting by hand of the top coat where there may be chalking, peeling or other distressed areas (excluding exposed surfaces that have not been painted previously). - Preparing the surface of existing paint for painting using manual methods such as hand scraping, wash down (excluding jet wash and water blasting), or light rub (no power tools to be used). - Clean and spot blast surfaces (as long as the works take place on $\leq 10\%$ of total bridge surface area) that have freckled rust or where the protective coating is no longer effective. EXCLUDES: - Activities involving lead paint removal or repair. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Minor concrete repairs and concrete elements	INCLUDES: - Activities required to repair, rehabilitate and/or replace $\leq 10\%$ of concrete structural elements. - Sealing minor cracks/spalls with no evidence of corrosion. - Patching areas where there is evidence of corrosion but without significant loss of reinforcing steel section. - The removal of all damaged concrete and reinforced steel by water blasting or mechanical removal. - Slab jacking. - Repair of piers or pile caps. EXCLUDES: - Activities not using like for like materials. - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Repair of railings / traffic barriers	INCLUDES: - Activities required to replace damaged guardrail or traffic barrier sections including guardrail in adjacent approaches to the bridge. - Kerb and rail washdown using potable water where all debris is contained and scuppers are blocked. EXCLUDES: - Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding). - Activities not using like for like materials.
Masonry / brick repairs	INCLUDES: Activities required to restore line and level of masonry or brick facing, or integrity of masonry or brick facing where movement or deterioration is not of structural significance, as long as works take place on $\leq 10\%$ of the bridge elements and only involve like for like repairs to the elements.

Activity	Description
	EXCLUDES: • The installation of new masonry / bridge structures. • Activities not using like for like materials. • Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Existing cathodic protection systems	INCLUDES: • Activities required for the maintenance of existing cathodic protection systems. EXCLUDES: • Installation of new or replacement cathodic protection systems. • Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bridge timber elements - other	INCLUDES: • Activities required for the replacement of timber deck elements, including the installation of a spray seal timber deck as long the works take place on ≤10% of the bridge elements. EXCLUDES: • Activities not using like for like materials. • Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Bridge - steel elements	INCLUDES: • Activities required for the repair of steel bridge elements, as long the works take place on ≤10% of the bridge elements. EXCLUDES: • Activities not using like for like materials. • Any work that requires the installation of temporary scaffolding erected from within a watercourse (does not include hung or suspended scaffolding).
Scour protection	INCLUDES: • Minor scour locations are filled with local soil, gravel or rubble. • Minor earthworks and excavation to key in the base of the structure. • Scour prevention material placed on fill sections. EXCLUDES: • Scour protection in waterways. • Any work that requires the installation of scaffolding or structures erected from within a watercourse (does not include hung or suspended scaffolding).

Note: *Like for like replacement* is the replacement of materials on a heritage item that is the same or very similar with the current material types, size, dimension and, where possible, construction methods. RTA requires like for like replacement on all heritage bridge works carried out under Step 1 of the environmental assessment procedure for routine and minor works. Appropriate materials for timber would be the same hard wood and for iron work would be mild steel. Seek advice from the heritage team in Environment Branch for detail on other appropriate like for like materials.

Activity	Description
Snow and ice clearing	
Mechanical removal of snow and ice	INCLUDES: - Activities required to remove snow from road pavements by the use of snow ploughs and snow blowers performed in accordance with the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. - Removal of ice build-up following operation of a snow plough by a grader performed in accordance with the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. EXCLUDES: - Snow stockpiling outside of the areas identified in the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. - Any works or operations relating to snow maintenance machinery and equipment depots.
De-icing activities	INCLUDES: - Application of wet salt to road surfaces using a salt spreader performed in accordance with the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. - Application of dry salt to road surfaces using a salt spreader performed in accordance with the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. EXCLUDES: - Use of de-icing chemicals other than salts. - Any works or operations relating to snow maintenance machinery and equipment depots. - Any works or operations associated with salt storage.
Other winter maintenance activities	INCLUDES: - Snow pole maintenance. - Application of grit to the road pavement by the use of a grit spreader performed in accordance with the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. - Removal of grit by the use of a scraper to deposit on the road shoulder performed in accordance with the <i>Snow and Ice Clearing Environmental Work Method Statement</i>. EXCLUDES: - Any works or operations relating to snow maintenance machinery and equipment depots.

About this document

Reference number	EIA-P05-G01-T01
Title	Activity checklist
Parent procedure	EIA-P05-1

Approval and authorisation		Name
Prepared by	Environmental Officer Environment Officer Senior Environmental Specialist (Planning & Assessment)	Mark Woods Kelly Carbery Michelle Forwood
Approved by	Manager Environmental Planning & Assessment	Joy Duncan

Location	File name
G:\ENVIRNMNT\Planning and Assessment	EIA-P05-G01-T01

Document status	Date
Version 2.2	1 May 2012

Version	Date	Revision Description
1.0	30/6/10	First issue
1-1	14/02/11	Changes to vegetation clearing requirements.
1-2	10/06/11	Inclusion of snow and ice clearing activities.
1-3	22/08/11	Sandstone platforms and exposures in the Sydney Basin excluded from disturbed zone definition.
2.0	01/11/11	Additional activities added to checklist, additional inclusions and exclusions added to existing activities. Best practice updates based on user feedback.
2.1	12/01/12	Change to line of sight vegetation removal exclusion
2.2	01/05/12	Clarification to disturbed zone - works in waterway.

Your comments and suggestions to improve this or any of the EIA guidelines may be sent to:

Manager Environmental Planning and Assessment
Environment Branch, Roads and Maritime Services
Level 17, 101 Miller Street
North Sydney, NSW 2060

Joy_Duncan@rta.nsw.gov.au

Ph: 8588 5735